

Mounting Template

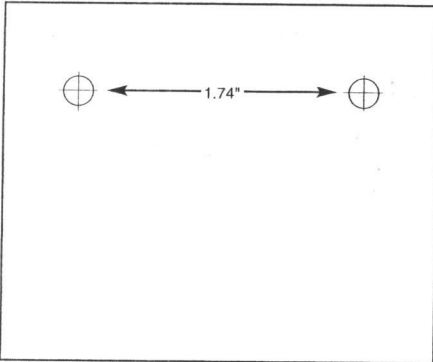
Use template below to mount to wall or any flat surface, using #10 screws.

Plantilla de montaje

Utiliza la plantilla de más abajo para montar el producto en una pared u otra superficie plana, con tornillos del n° 10.

Gabarit de montage

Utiliser le gabarit fourni ci-contre pour monter le produit sur un mur ou sur une surface plane quelconque en utilisant les vis n° 10.

**Owner's Manual****7060 LED**

WARNING: Before disassembling any part of the 7060 LED flashlight, ensure that the flashlight has not been operating for five (5) minutes. During operation, the LED module can become extremely hot and may cause injury if touched.

Flashlight Operation

The 7060 LED is a high performance flashlight for use by professionals. This flashlight comes equipped with a high output LED pre-focused lamp that emits a strong light beam of white light. There is no need to focus the 7060 LED.

DO NOT SHINE THIS FLASHLIGHT DIRECTLY INTO ANY PERSON'S EYES: THIS MAY RESULT IN INJURY.

Your 7060 LED battery pack comes to you partially charged and needs to be fully charged prior to use.

To Attach the Power Cord to the Charger Base

1. Rotate the charger so that the base is facing towards you.
2. Take the right angled plug from the power transformer and push the metal end into the socket (the transformer socket is located in a pocket in the base).
3. Feed the cord into the channel leading from the pocket.
4. Attach the Power Cord to the electrical supply.

NOTE: The Charger LED will turn red when the power is supplied.

Charging To charge the 7060 LED: CHARGER

The charger is capable of charging the battery pack in under 5 hours. The LED Charge Lights will indicate where the battery is in the charge cycle as follows:


Solid Red = 7060 Not Connected
Flashing Red Light = 7060 Charging
Solid Green Light = 7060 Fully Charged

There is no need to fully discharge the 7060 LED before charging the battery. Charging can occur whenever required and the 7060 LED can be left indefinitely in the charger housing without fear of over-charging.

To Charge:

1. Turn off the 7060 LED.
2. Snap the 7060 LED into the arms of the charger with the switch facing towards you and the round charger contacts engage with the 7060 LED contacts. The LED will turn from a SOLID RED to a FLASHING RED to indicate the charging cycle.
3. When the LED turns SOLID GREEN the battery pack is fully charged.

NOTE: A flashing green LED indicates a charging problem. Remove the flashlight from the charger and clean the charging contacts. If the problem persists, please return the flashlight for warranty related repair.

**Battery Replacement**

After approximately 500 charge/discharge cycles, the LI-ION battery stick will no longer hold a charge and must be replaced. The battery stick is available wherever Pelican flashlights are sold or directly from Pelican Products Customer Service.

To replace the battery stick:

1. Unscrew the tail switch located at the rear of the 7060 LED.
2. Remove the battery stick.
3. Insert the new battery stick following the direction on the battery decal.
4. Replace the tail switch & tighten it all the way down.

NOTE: Please act responsibly when disposing of the LI-ION Battery Stick. This part is recyclable and should not be disposed of in the municipal waste system. Please check with your local waste disposal authority for information.

Battery Care

• **Do not** over discharge your flashlight in an attempt to reduce a "memory" condition. This practice is unnecessary as modern LI-ION batteries, when used in flashlights such as the 7060 LED are highly unlikely to develop this condition. In addition, deep discharging of the batteries may cause the batteries to vent potentially dangerous gases and electrolytes.

O-ring Maintenance

Check closely for cuts, scratches, or otherwise damaged O-ring or mating lens lip surface. Remove any dirt or foreign matter from O-ring sealing surfaces. Keep threads, O-ring groove and inside lip of lens lubricated with silicone grease. See Warranty information for replacement of O-ring.

To turn on the light momentarily:

Gently press down on the switch cover and the 7060 LED will operate until pressure is released.

To turn on the 7060 LED for continual use:

Firmly press down on the switch cover until a "click" is heard and the 7060 LED will operate. Press down on the switch again to turn off the 7060 LED.

Charger Mounting

The 7060 LED Charger Base can be permanently mounted in most positions (except upside-down) in vehicles. Two mounting holes are provided to enable attachment using #10 screws.

The right angle plug must be connected before the charger can be mounted (see above).

Vehicle Installation

The 7060 LED charger can be permanently installed in most vehicles and this operation should be performed by a professional auto technician. The charger should not be installed upside-down since certain conditions may cause the 7060 LED to be ejected from the charger. When installing the charger, ensure that the Direct Wiring Rig is connected to an ignition key-switched line. The high amperage draw of this charger may drain the vehicle's battery if connected directly to the battery.

REPLACEMENT PARTS

| CAT. # | DESCRIPTION |
|---------|--------------------------------------|
| 6057F | 110V TRANSFORMER FOR CHARGER |
| 6061F | DIRECT WIRING RIG FOR CHARGER |
| 7070 | DESK/DASH SMART CHARGER BASE UNIT |
| 8056F | 12V PLUG-IN CHARGER CORD FOR CHARGER |
| 7069 | REPLACEMENT LI-ION BATTERY PACK |
| 7052 YW | TRAFFIC WAND (Yellow) |
| 7052 OR | TRAFFIC WAND (Orange) |

If your local retailer does not stock the above accessory parts, you may order them directly from Pelican Products. Send check or money order in U.S. dollars, or order by phone using MasterCard VISA (ask for Customer Service). SORRY, NO C.O.D.'s. California residents add 8.25% sales tax. Allow 2-3 weeks delivery time. Pelican Products pays postage and handling charges. POSTAGE PAID FOR U.S. ZIP CODES ONLY.

WARRANTY RETURN POLICY

Send all items (except for the battery pack) for repair or replacement directly to Pelican Products Customer Service Dept. (postage p. Battery pack does not have a lifetime warranty. It has a life of 50k charges & must be replaced. Please call for a return authorization number. Per our guarantee, Pelican Products will replace or repair any broken or defective products. Upon receipt of goods, Pelican Products will notify you of any handling and return postage charge.

**PELICAN 7060 LED
MANUAL DE INSTRUCCIONES**

ADVERTENCIA: Antes de desmontar cualquier pieza de la linterna 7060 LED, asegúrese de que ésta no se haya usado durante por lo menos cinco (5) minutos. Durante su uso, el módulo LED puede calentarse mucho y causar lesiones por contacto.

Uso de la linterna

El modelo 7060 LED es una linterna de alto rendimiento para uso profesional. Viene equipada con una lámpara preenfocada LED de gran potencia que emite un intenso haz de luz blanca. No es necesario enfocar la linterna 7060 LED.

NO APUNTE LA LINTERNA DIRECTAMENTE A LOS OJOS DE OTRA PERSONA, YA QUE PODRÍA PROVOCARLE LESIONES.

La batería de la linterna 7060 LED se entrega parcialmente cargada y debe cargarse por completo antes de su uso.

Para conectar el cable de alimentación a la base de cargador:

1. Haga girar el cargador de modo que la base apunte hacia usted.
2. Tome el conector en ángulo recto del transformador de corriente y conecte el extremo metálico en el enchufe situado en un pequeño compartimento de la base.
3. Haga pasar el cable por el canal que llega hasta el compartimento.
4. Enchufe el cable de alimentación a una toma de corriente.

NOTA: El LED rojo del cargador se encenderá al recibir corriente.

Carga: Para cargar la linterna 7060 LED: CARGADOR

El cargador puede cargar la batería en menos de 5 horas. Las luces de carga indican en qué ciclo de carga se encuentra la batería:

Luz roja fija = la linterna 7060 no está conectada
Luz roja parpadeante = la linterna 7060 está en proceso de carga
Luz verde fija = la linterna 7060 está completamente cargada

No es necesario que la batería de la linterna 7060 LED se haya descargado por completo antes de volver a cargarla. El proceso de carga puede realizarse siempre que sea necesario y la linterna 7060 LED puede dejarse de forma indefinida en el cargador sin miedo a que se sobrecargue.

Pelican Unconditional Lifetime Guarantee of Excellence

If for any reason you are not satisfied with the quality or performance of any PELICAN product, PELICAN PRODUCTS will gladly replace the product or refund your money (at your option) within 30 days of purchase through the original dealer/retailer. PELICAN PRODUCTS will continue to guarantee the product directly, for a lifetime, against breakage or defects in workmanship. Lifetime guarantee does not cover the lamp or batteries. The o-rings must be kept greased (and replaced if damaged) per product instructions. This guarantee is void only if the PELICAN product has been abused beyond normal and sensible wear and tear.

The above guarantee does not cover sharkbite, bear attack or children under 5.

Garantía incondicional de calidad de Pelican

Si, por cualquier motivo, no está satisfecho con la calidad o el rendimiento de cualquiera de los productos de Pelican, Pelican Products le cambiará el producto en cuestión o le devolverá el dinero (lo que usted prefiera) dentro de un plazo de 30 días a partir de la fecha de compra del producto a través de su distribuidor original. Pelican Products ofrece una garantía de por vida que cubre la rotura o cualquier defecto de fabricación del producto. La garantía de por vida no cubre ni la lámpara ni la batería. Los anillos de sellado deben mantenerse lubricados (y cambiarse si sufren daños) de acuerdo con las instrucciones del producto. Esta garantía quedará anulada en caso de que el producto se utilice de forma indebida y sufra un desgaste mayor al habitual. Esta garantía no cubre los daños sufridos por la mordedura de un tiburón, el ataque de un oso o la manipulación del producto por parte de niños menores de 5 años.

Garantie sans conditions à vie de Pelican

Si pour une raison ou une autre, vous n'êtes pas satisfait de la qualité ou de la performance d'un produit Pelican, nous vous le remplaçons ou le remboursons (au choix) dans les 30 jours suivant l'achat par l'intermédiaire du revendeur. La garantie des produits Pelican reste valable à vie en cas de casse ou de défauts de fabrication. La garantie ne couvre pas l'ampoule ou les piles. Les joints toriques doivent être graissés (et remplacés en cas de dommages) conformément aux instructions du produit. Cette garantie est annulée uniquement si le produit PELICAN n'a pas été utilisé dans des conditions normales d'utilisation. Cette garantie ne couvre pas les morsures de requin, les attaques d'ours ou les dommages provoqués par des enfants de moins de 5 ans.



PELICAN™
You break it, we replace it... forever.



23215 Early Ave. • Torrance, CA 90505

(310) 326-4700 • FAX (310) 326-3311 • www.pelican.com

All trademarks and logos displayed herein are registered and unregistered trademarks of Pelican Products, Inc. and others.