

INSTALLATION INSTRUCTIONS

FAUCET WATER FILTER

A REPLACEMENT FOR THE FOLLOWING WATER FILTER:

Brita®

· Faucet filter white

FILTER LIFE: 4 MONTHS OR 100 GALLONS, WHICHEVER COMES FIRST WILL VARY BASED ON WATER CONDITION

OPERATING SPECIFICATIONS:

Min. operating temperature.....	1°C/34°F
Max. operating temperature.....	38°C/100°F
Min. working pressure.....	138 kPa/20 psi
Max. working pressure.....	689 kPa/100 psi
Rated capacity.....	378 litres/100 gallons

INSTALLATION PROCEDURES:



1. To remove the old cartridge, turn water off, press the filter cartridge release button located at the back of the filter cup and pull cartridge up to remove it.

NOTE: If the filter is removed for cleaning purposes while in green mode, please insert filter back into unit within 30 seconds to make sure the counter is not reset. However, once the Filter Replacement Indicator has begun to show a red light (indicating the Replacement Period), do not remove the cartridge unless you intend to replace it. Once the filter has entered the Replacement Warning Period, inserting a cartridge will automatically reset the Filter Replacement Indicator.

2. Support the bottom of the filter system with one hand. Insert the filter cartridge into the filter cup until a "click" is heard. Do not force the filter cartridge into the system base. Inserting the new filter cartridge automatically resets and activates the electronic Filter Replacement Indicator. A green signal will flash, indicating that the filter is engaged.

3. Turn on the faucet to flush the new filter for 5 minutes to remove any carbon dust and activate the filter. It is normal for carbon dust to appear. The 100 gallon/ 378 liter filter life begins after the 5-minute conditioning period.

NOTE: Use with cold water only. Do not run hot water (above 100°F/38°C) through the filter, as it may damage the filter.

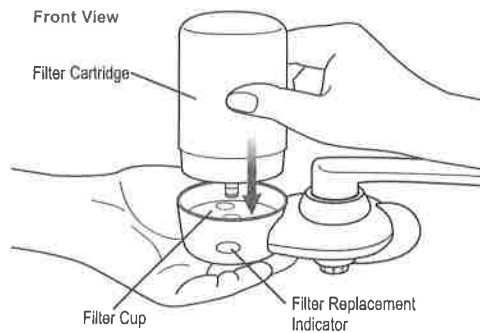

STORAGE AND MAINTENANCE:

- Replace your filter every 4 months or 100 gallons to achieve optimal performance and prevent bacteria and fungus growth in your filter.
- Keep your unused filters in a cool, dark, and dry place until you need them.

NOTE: This filter should not be used with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

FREQUENTLY ASKED QUESTIONS:

Q: Why are there black specks in the water?

A: It's normal for black carbon particles to appear on the outside of your filter. This happens when the filter is jarred in shipping. It's safe. Flushing the filter before use will remove the carbon dust.

Q: If I do not change my filter every 6 months, can this damage the system?

A: Yes. You must replace the filter every 6 months or sooner if water flow is reduced or if there is heavy sediment/rust sediment. Filters left in longer will fatigue, degrading the filter performance.

Q: Do I need to flush the filter before using?

A: Yes. It is highly recommended you flush the filter before using. Water filters are made from advanced coconut carbon block, so there are some carbon fines in the filter. You need to flush firstly to remove those carbon fines to get clean water.

WARNING:

To reduce the risk of property damage due to water leakage, this filter **MUST** be installed in accordance with the manufacturer's specifications and instructions. This filter unit must be replaced every 100 gallons or 4 months. Failure to follow instructions and operating specifications will void your warranty. Further, manufacturer assumes no responsibility or liability for damages arising out of misuse of the product.

Brita® is a registered trademark of BRITA LP.

CUSTOMER SERVICE:

✉ service@water-filter.com