




DUCT SOUND ATTENUATOR


PRODUCT
SPECIFICATIONS
AND ENGINEERING
INFORMATION
SUBMITTAL DATA
736-12-04

ALDES PASSIVE SOUND ATTENUATORS

For attenuation of fan noise propagated through ventilation ductwork. May be used in supply and exhaust ductwork, and are available in 4", 5", 6", 8", 10", and 12" diameters.

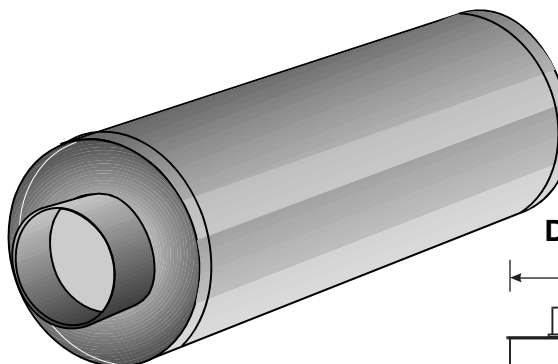

DIMENSIONS

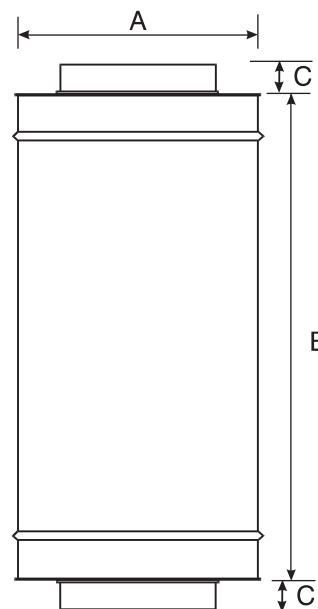

DIMENSIONS

	DIA.	A	B	C	WEIGHT
Model P/N					LBS.
94 631	4"	7.9"	24.5"	1.5"	9.9
94 632	5"	8.8"	24.5"	1.5"	11.0
94 633	6"	10.2"	24.5"	1.5"	12.5
94 634	8"	12.6"	24.5"	2.5"	15.5
94 635	10"	14.6"	24.5"	2.5"	19.5
94 636	12"	17.1"	24.5"	4.5"	26.0

ACOUSTIC INSERTION LOSS

	63 Hz	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
Model								
4"	3	8	13	25	40	50	40	21
5"	3	7	12	23	39	47	32	18
6"	4	4	8	21	37	40	22	14
8"*	3	8	9	19	32	17	8	3
10"*	3	6	7	15	29	11	5	4
12"*	1	5	6	15	21	9	4	5

*Tested to ISO 7235 Standard

PROJECT

DATE

SUBMITTED BY

CONTRACTOR



VENTILATION CORPORATION
4537 NORTHGATE COURT
SARASOTA, FL 34234-2124, USA
Tel: 941 • 351- 3441
Fax: 941 • 351- 3442
<http://www.aldes-us.com>
e-mail: info@aldes-us.com



736.pm6