

CFS22 & CFS22-1.5

Application

- Multipurpose

Water Filtration Systems

Spec No. _____

Quantity _____



CFS22

Product Features

- ◆ 1" and 1-1/2" NPT inlet and outlet connections allow high flow rates for point-of-entry applications.
- ◆ Built-in pressure relief button relieves internal pressure for convenient cartridge change-outs.
- ◆ Pressure tested high impact plastic design helps withstand pressure surges and water hammer.
- ◆ FDA CFR-21 and/or NSF compliant materials.
- ◆ Mounting bracket, screws and filter wrench included.

CUNO's CFS22 Series high flow filter housings allow installation either at the point-of-entry or the point-of-use. The low pressure drop across the system helps provide adequate water flow and pressure to all equipment. Various media options are available for both sediment and chlorine taste and odor reduction.

Product Specifications

Model Number	Part Number	Description	Flow Rate	Cartridge Options
CFS22	56067-04	Opaque, 20" Length 1" NPT Connections	45 gpm max (170.3 lpm) 10 gpm (37.8 lpm) w CFS215-2	CFS210-2 CFS211-2 CFS212-2
CFS22-1.5	56067-05	Opaque, 20" Length 1.5" NTP Connections	60 gpm max (227.1 lpm) 10 gpm (37.8 lpm) w CFS215-2	CFS214-2 CFS215-2



CFS22 & CFS22-1.5 Water Filtration Systems

Spec No. _____
Quantity _____
Model Number _____
Part Number _____

Physical Specifications:

- 1" or 1 1/2" NPT inlet and outlet ports.
- System to be a single vessel design.
- System to be manufactured from FDA CFR-21 and/or NSF compliant material.
- System to have maximum operating pressure of 100 psi (690 kPa) and operating temperature of 100° (38°C).
- System to come with mounting bracket.
- System to incorporate a pressure relief button.


IMPORTANT: Installation Tips:

- Shut off downstream equipment prior to installation of the system.
- Do not exceed operating parameters for temperature or pressure.
- Install on cold water line only.
- For commercial use only.

IMPORTANT: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

IMPORTANT: Change the filter cartridge at least every 6 months.

CUNO Incorporated recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold.

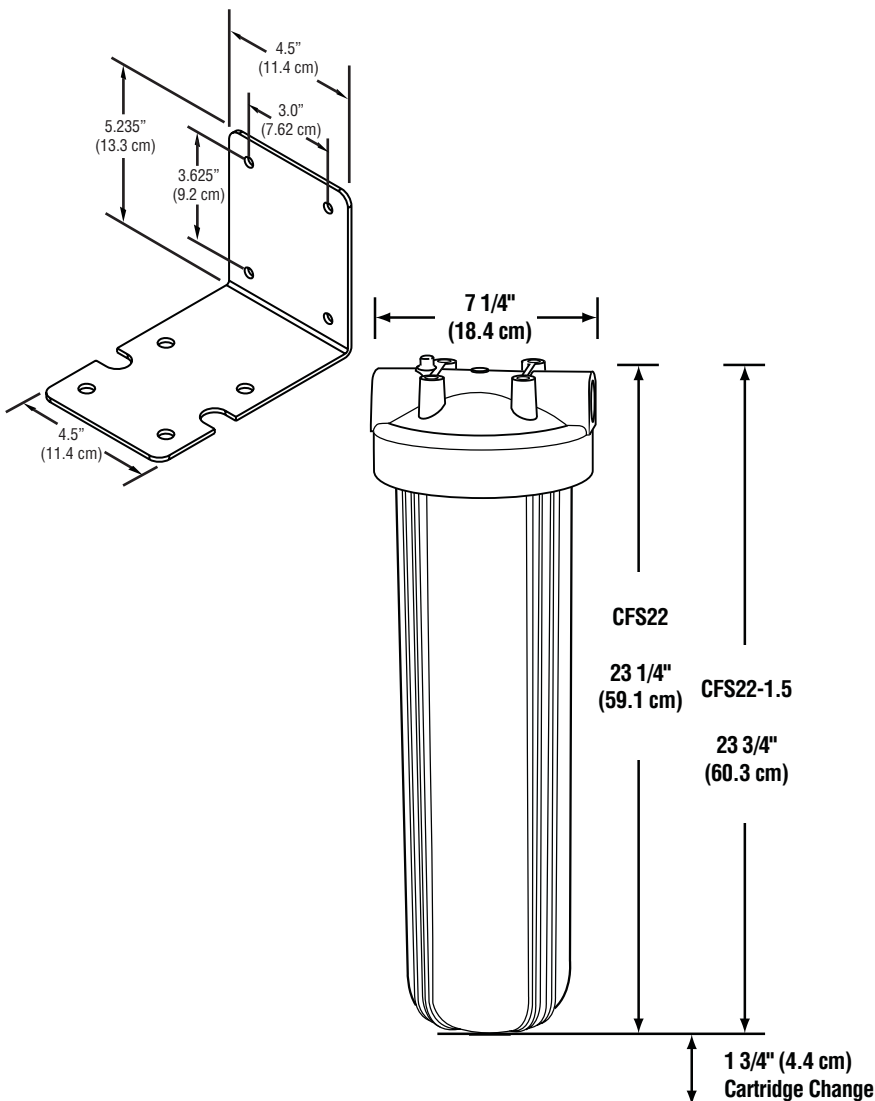

5 Year Limited Warranty

CUNO Incorporated warrants that this product is free from defects in materials and workmanship. This limited warranty, together with any and all warranties implied by law, shall be limited to a period of five (5) years from the date of original purchase. This limited warranty does not apply to failures that result from abuse, misuse, alteration or damage not caused by CUNO or failure to properly comply with these installation or cartridge change-out instructions. This limited warranty is subject to exclusions and limitations. Please refer to the Warranty Card provided with the product for details.

CUNO is a trademark of 3M Company used under license.

© 2006 3M Company. All rights reserved.
LITFS236 1006



CUNO Incorporated
400 Research Parkway
Meriden, CT 06450
Toll Free: 1-888-218-CUNO
Worldwide: 203-237-5541
Fax: 203-238-8701
www.cunofoodservice.com • www.cuno.com