



DEV9108-17

# CG5-10S Replacement Cartridge

## Drop-in Replacement Cartridge for Foodservice Applications



CG5-10S Replacement Cartridge: DEV9108-17

### BENEFITS

Five micron carbon block reduces dirt and fine particles from drinking water

Effectively reduces unwanted tastes, odor and chlorine

High porosity design prevents the cartridge from plugging before its adsorption capacity is exhausted

Improves the taste of beverages such as fountain drinks and coffee

Phosphate reduces water-related equipment problems caused by scale build-up from dirt and dissolved minerals

Helps keep equipment running at peak efficiency and keeps maintenance costs down

Drop-in design fits most 10" bowls

### INSTALLATION TIPS

Install vertically so bowls hang down.

Allow 2-1/2" clearance below the cartridge for easy cartridge replacement

Make sure O-ring on bowl is sufficiently lubricated

Always screw on bowls by hand; do not use a housing wrench

### OPERATION TIPS

Change cartridges on a regular 6 month preventative maintenance program

Change cartridges when capacity is reached or when pressure decreases

Always inspect O-ring; change and/or lubricate if necessary

Always flush the filter cartridge at time of installation and cartridge change

### APPLICATION/SIZING

For foodservice applications requiring scale reduction

Drop-in cartridge for taste, odor and sediment reduction

Capacity: 6,000 gallons (22,800L)

# CG5-10S Replacement Cartridge

## SPECIFICATIONS

### Overall Dimensions:

9.75"H x 2.87" Diameter

### Service Flow Rate:


Maximum 1.67 gpm (6.3 Lpm)

### Pressure Requirements:

30 - 125 psi (2.1 - 8.6 bar), non-shock

Temperature: 40 - 100°F (4.4 - 38°C)

No electrical connection required

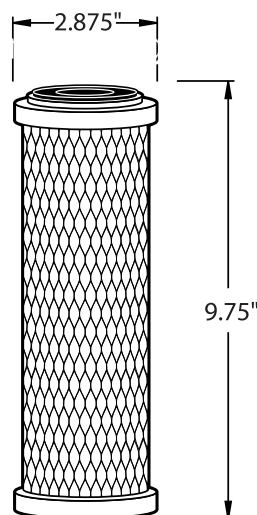

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

## WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.



System Tested and Certified by NSF International against NSF/ANSI Standard 42 for the reduction of:

Standard No. 42: Aesthetic Effects  
Chemical Unit  
Taste and Odor Reduction  
Chlorine Reduction



EVERPURE, LLC  
1040 Muirfield Drive  
Hanover Park, Illinois 60133  
Toll Free (800) 323-7873  
Tel (630) 307-3000  
Fax (630) 307-3030  
<http://www.everpure.com>

*In Europe:*  
N.V. EVERPURE (EUROPE) S.A.  
INDUSTRIEPARK WOLFSTEE  
TOEKOMSTLAAN 30  
B-2200 HERENTALS  
BELGIUM  
TEL 32-14-283500  
FAX 32-14-283505

*In Japan:*  
EVERPURE JAPAN LLC  
HASHIMOTO MN BLDG. 7F  
3-25-1 HASHIMOTO SAGAMIHARA-SHI  
KANAGAWA 229-1103  
JAPAN  
TEL 81-(0)42-775-3011  
FAX 81-(0)42-775-3015

Everpure, LLC  
1040 Muirfield Drive  
Hanover Park, IL 60133  
Phone: 630-307-3020 Fax: 630-307-3030