



EV9337-22

Dual High Flow Coldrink M-XC2

Delivers premium quality water for high volume, multiple fountain applications

Dual High Flow Coldrink M-XC2: EV9337-22
 XC2 Replacement Cartridge: EV9613-10
 EC210 Prefilter Cartridge: EV9534-26



BENEFITS

- High volume central system delivers premium quality water to meet demanding peak periods
- New and improved Micro-Pure II media inhibits the growth of bacteria
- Reduces chlorine taste and odor and other offensive contaminants that can adversely affect the taste of beverages
- Improves the taste of fountain beverages and helps retain the drink's carbonation
- Precoat submicron technology reduces dirt and particles as small as 1/2 micron in size and reduces possible health contaminants such as cysts
- Protects drink system seals, pump, tubing and small orifices from clogging, corrosion and abrasive wear
- Sanitary cartridge replacement is simple, quick and clean. Internal filter parts are never exposed to handling or contamination
- NSF Certified under NSF/ANSI Standards 42 and 53

INSTALLATION TIPS

- Choose a mounting location suitable to support the full weight of the system when operating
- Never use saddle valve for connection
- Use 3/4" water line
- Install vertically with cartridges hanging down
- Allow 2-1/2" clearance below the cartridge for easy cartridge replacement
- Flush cartridges by running water through system for five minutes at full flow

OPERATION TIPS

- Change cartridges on a regular 6 month preventative maintenance program
- Change cartridges when capacity is reached or when pressure falls below 10 psi
- Service flow rate must not exceed 13,36 gpm
- Always flush the filter cartridge at time of installation and cartridge change

APPLICATION/SIZING

- For fountain beverage applications
- For multiple, simultaneous applications
- Serves up to 8 machines at a time, including ice machines, coffee, etc.
- Dual High Flow Coldrink M-XC2 Rated Capacity: 96,000 gallons

Dual High Flow Coldrink M-XC2

SPECIFICATIONS

Overall Dimensions:
36"H x 37.5"W x 13.5"D

Inlet connection:
3/4" MNPT

Outlet connection:
3/4" FNPT

Service Flow Rate:
Maximum 13.36 gpm (50.57 Lpm)

Rated Capacity (S-MC2):
72,000 gallons


Pressure Requirements:
10 - 125 psi (0.7 - 8.6 bar), non-shock

Temperature: 35 - 100°F (2 - 38°C)
No electrical connection required

Shipping Weight: 82 lbs.

Operating Weight: 85 lbs.

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

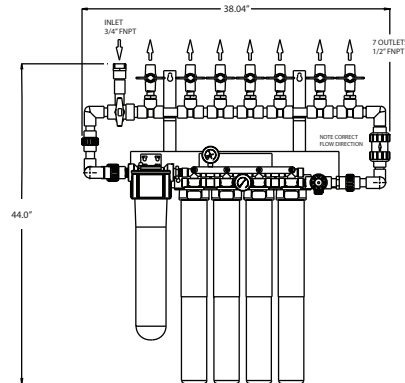

WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.

EVERPURE®

Worldwide Headquarters:
EVERPURE, LLC
1040 Muirfield Drive
Hanover Park, Illinois 60133
Toll Free (800) 323-7873
Tel (630) 307-3000
Fax (630) 307-3030
<http://www.everpure.com>

In Europe:
Pentair Water Belgium B.V./B.A.
Industriepark Wolfstee
Toekomstlaan 30
B-2200 Herentals
BELGIUM
TEL: +32.(0).14.283.500
FAX: +32.(0).14.283.505

In Japan:
Hashimoto MN Bldg. 7F
3-25-1 Hashimoto Sagamihara-Shi
Kanagawa 229-1103
JAPAN
TEL: 81.(0)42.775.3011
FAX: 81.(0)42.775.3015

Everpure
1040 Muirfield Drive
Hanover Park, IL 60133