

INSTALLATION INSTRUCTIONS

FAUCET WATER FILTER

A REPLACEMENT FOR THE FOLLOWING WATER FILTER:

Culligan®

· FM-15RA

FILTER LIFE: 2 MONTHS OR 200 GALLONS, WHICHEVER COMES FIRST
WILL VARY BASED ON WATER CONDITION

FILTER FEATURES:

- Economical alternative to expensive substitutes
- Easy installation and operation
- Provides cleaner, fresher water by reducing impurities
- Designed to provide up to 2 months of life or 200 gallons
- Does not remove minerals which may be beneficial to health

OPERATING SPECIFICATIONS:

Min. operating temperature.....	0.6°C/33°F
Max. operating temperature.....	38°C/100°F
Min. working pressure.....	.210 kPa/30 psi
Max. working pressure.....	689 kPa/100 psi
Rated capacity.....	.757 litres/200 gallons
Flow rate.....	1.9 lpm/0.5 gpm

INSTALLATION INSTRUCTIONS:


1. Turn off faucet. Unscrew the filter cartridge from underneath the housing. Turn the finger tabs as shown below. Allow the cartridge to drop down in your hand. Dispose of used cartridge.

NOTE: Some water may come out when filter cartridge is removed.

2. Insert new filter cartridge up into housing and turn 2 1/2 – 3 full turns, until it stops.

NOTE: If filter leaks, turn cartridge to make sure it is completely sealed.

NOTE: It is important to flush each new cartridge for 10 minutes to remove all carbon fines (the fines are not harmful but should be flushed out before using the filter). The valve stem will automatically return to the unfiltered position when the water is turned off. Allow system to flush for 3 seconds before each use.

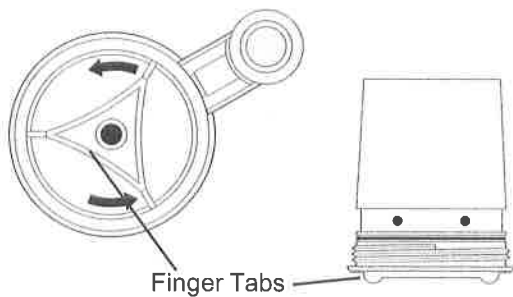

009A7

STORAGE AND MAINTENANCE:

- Replace your filter every 2 months to prevent bacteria and fungus growth in your filter, supply lines, and storage tank.
- Stored filters do not expire. Keep your unused filters in a cool, dark, and dry place until you need them.
- If you do not use your water filter for more than four days, run two gallons of water before using it to prevent bad tasting water.

FREQUENTLY ASKED QUESTIONS:

Q: Do I need to remove to the filter prior to descaling equipment?

A: Yes, remove filter prior to descaling and inspect for integrity if needed replace with a new filter.

Q: Why are there black specks in the water or why does my water taste funny?

A: Water filters are made from the purest carbon blocks. When the filter ships it bounces around and knocks carbon granules loose from the block. These little carbon granules are called fines. All of the quality filters in the market place require a preliminary flushing to remove the carbon fines. Some systems may need to be flushed more than once. This is especially true if you have scale or lime water. If you go on vacation and do not use your filtered water for several days, flush the systems again to remove any stagnant water.

Q: If I do not change my filter every 2 months, can this damage the system?

A: Yes, you must replace the filter every 2 months or sooner if water flow is reduced or if there is heavy sediment/rust present. Filters left in longer will fatigue, degrading filter performance.

NOTE: This filter should not be used with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

WARNING:

To reduce the risk of property damage due to water leakage, this filter **MUST** be installed in accordance with the manufacturer's specifications and instructions. This filter unit must be replaced every 200 gallons or 2 months. Failure to follow instructions and operating specifications will void your warranty. Further, manufacturer assumes no responsibility or liability for damages arising out of misuse of the product. Culligan® is a registered trademark of Culligan interaction Co.

CUSTOMER SERVICE:

☎ 1-888-352-3558 Mon-Fri 8:00 AM-5:00 PM (PST)

✉ service@water-filter.com