

Installation instructions

Outdoor water filter

A replacement for the following water filters:

PF-2® Replacement Filter

Filter life: The total water purification volume of each filter cartridge is 500 gallons.


Installation instructions:

Priming Procedure

1. Place the rubber-priming washer (tan colored) onto one end of a white filter and align the hole in the washer with the hole in the white filter.
2. Press the priming washer up against a sink faucet so that the priming button creates a seal between the faucet and the white filter.
3. While holding priming washer against faucet, turn on the cold water gently, allowing water to fill the cavity of the white filter and discharge from the opposite end. Allow water to discharge for at least 120 seconds or until water runs clear whichever is longer.

Note: Place thumb on top of faucet to apply pressure and create a better seal.

4. Prime each additional white filter repeating steps 1-3.

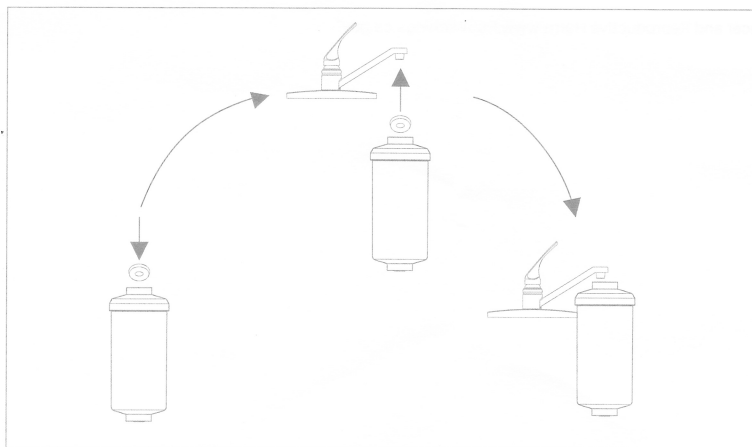

Caution:

This filter should not be used with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Installation Procedure:

1) Remove upper chamber from filtration system and place it upside down on a counter so that the stems of the white filter are facing upward.

2) With the water flow-arrow pointing away from the upper chamber (the white filter have threads on one end only), screws the white filter onto the stems of each white filter eight full revolutions.

Note:

a: Do not screw on more than eight revolutions as this may damage the internal media screen.

b: The flow arrow should point away from upper reservoir.

c: Replace the upper reservoir onto the lower reservoir (the white filter should now be hanging inside the lower reservoir). Fill the upper reservoir with water and let it drain into the lower reservoir. When the lower reservoir is full, discard the first batch of water, which may contain residual process dust. Your purification system is now ready for use.

Warning:

To reduce the risk of property damage due to water leakage, the filter MUST be installed in accordance with the manufacture's specifications and instructions. This filter unit must be replaced every 500 gallons. Failure to follow instructions and operating specifications will void your warranty. What's more, manufacturer assumes no responsibility or liability for damage arising out of misuse of the product.

*The service life mentioned above is subject to chlorine reduction.
Actual result varies according to the local water quality.

California Residents

"  WARNING: Cancer and Reproductive Harm-www.P65Warnings.ca.gov "

Qingdao Ecopure Filter Co., Ltd.

Add.: No.13, Yishengbai Road, Jimo, Qingdao, China

Made in China P001

EPA Est. No. 95301-CHN-1