

SPEC # \_\_\_\_\_

QUANTITY \_\_\_\_\_

### APPLICATION

## ESPRESSO



### AT A GLANCE

Aqua-Pure<sup>®</sup> Model SGP195BN-T single-cartridge water-filtration system assures consistent high-quality water for espresso and espresso-based drinks at flow rates to 1.0 gpm (3.8 lpm). A blend of high-capacity, strong - and weak-acid ion-exchange resins reduces calcium and magnesium ions to prevent hard scale formation on heating coils and boilers that results in energy inefficiency, downtime, and expensive service calls. Inlet water TDS and alkalinity are also reduced. Premium activated carbon reduces chlorine taste and odor and bitterness associated with poor water quality. A built-in bypass directs 75% of the inlet water through the media combination for treatment. Model SGP195BN-T has a capacity of 1,200 gallons (4,542 liters) for inlet water with 150 ppm (9 gpg) hardness.

### PRODUCT BENEFITS

- Consistent, great-tasting espresso and espresso drinks from water with reduced hardness, alkalinity, TDS, and chlorine taste and odor.
- Increased lifetime and capacity from a built-in bypass that allows 25% of inlet water to pass through untreated.
- Reduced hard scale formation on the heating coils by the reduction of calcium and magnesium ions results in improved energy efficiency and reduced downtime and expensive service calls.
- Patented\* valve-in-head design simultaneously shuts off and vents water with 1/4 turn, allowing for simple and trouble-free cartridge change-outs.
- SQC™ - Sanitary Quick Change – encapsulated cartridge design allows for fast and easy change-outs with a 1/4 turn while minimizing the possibility of leakage and contamination.
- FDA CFR-21 compliant materials provide assurance of safety.
- 3/8" FNPT horizontal inlet and outlet ports allow direct or easily adaptable connections to existing plumbing lines.
- Optional pressure gauge allows monitoring of downstream water pressure.
- Exhausted cartridges may be incinerated for environmentally conscious disposal.

### PRODUCT SPECIFICATIONS

| Model Number | Part Number | Reduction Claims                 | Capacity  | Service Flow Rate | Replacement Cartridge |
|--------------|-------------|----------------------------------|---|-------------------|-----------------------|
| SGP195BN-T   | 56176-02    | Hardness, Chlorine, Taste & Odor | 1,200 gal @ 9 gpg hardness<br>(4,542 lit @ 150 ppm) | 1.0 gpm (3.8 lpm) | P195BN:<br>56150-01   |


\* U.S. Patent #6,458,269

# Aqua-Pure® Commercial Products

SPEC # \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
MODEL NUMBER \_\_\_\_\_  
PART NUMBER \_\_\_\_\_

**Aqua-Pure®**  
COMMERCIAL PRODUCTS  
**SGP195BN-T**

## PHYSICAL SPECIFICATIONS

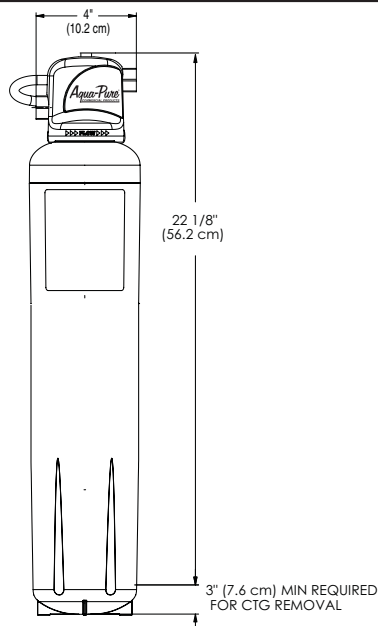

- System includes a head assembly, integral mounting bracket, and single cartridge filter.
- Optional downstream pressure gauge port in top of head assembly.
- Inlet and outlet fittings are either 3/8" FNPT.
- System incorporates an internal automatic 1/4 turn shut off valve.
- Filter cartridge is double o-ring seal type.
- System maximum operating pressure is 125 psi (862 kPa) and operating temperature 100°F (38°C).
- Recommended service flow rate is 1.0 gpm (3.8 lpm).
- Filter cartridge incorporates premium activated carbon media and a blend of ion-exchange media.
- System is CFR-21 compliant.
- Cartridge body is constructed from high-impact glass-filled polypropylene.
- Cartridges are sanitary in design, requiring no contact with the filter media during cartridge change-out.
- Filter cartridges require no pre-activation.
- Shipping weight: 5.8 lbs (2.6 kg) per case.
- Case Quantity: 1

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

CUNO Incorporated recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold. Change the filter cartridge at least every 6 months. CUNO shall not be liable for system failures due to improper maintenance.

## INSTALLATION TIPS

- Shut off downstream equipment prior to installation of the system.
- Choose mounting location to support full system weight when operating.
- Do not exceed operating parameters for temperature or pressure.
- Do not install outdoors.
- For commercial use only with cold water.

## LIMITED 5 YEAR WARRANTY

CUNO Incorporated warrants to the original purchaser-consumer that this product is free from defects in materials and workmanship. This warranty, together with any and all warranties implied by law, shall be limited to a period of five (5) years from the date of original purchase by the consumer. This warranty does not apply to failures that result from abuse, misuse, alteration or damage not caused by CUNO. This warranty is subject to exclusions and limitations. Please refer to the Warranty Card provided with the product for details.

## SERVICE WORLDWIDE

**CHINA**  
CUNO Filtration Shanghai Co. Ltd.  
No. 2 Plant East Side  
Xin Miao San Road  
XinQiao Town SongJiang District  
Shanghai, China 201612

**JAPAN**  
CUNO K.K.  
Hodogaya Station Building 6F  
1-7, Iwai-Cho, Hodogaya-Ku  
Yokohama 240-0023, Japan

**AUSTRALIA**  
CUNO Pacific Pty Ltd.  
140 Sunnyholt Road  
Blacktown, N.S.W. 2148  
Australia

**BRAZIL**  
CUNO Latina Ltda  
Rua AMF do Brazil - 251  
18120 Mairinque-SP, Brazil

**EUROPE**  
CUNO Limited  
21 Woking Business Park  
Albert Drive  
Woking, Surrey  
GU21 5JY, England

**SINGAPORE**  
CUNO Filtration Asia Pte Ltd  
2A Tuas Avenue 12  
Singapore 639023



Visit [www.nsf.org](http://www.nsf.org) for the claims associated with products that are NSF listed.



**CUNO Incorporated**  
400 Research Parkway  
Meriden, CT 06450, USA  
Toll Free: 1.888.218.CUNO  
Worldwide: 203.237.5541  
Fax: 203.238.8701  
[www.cunofoodservice.com](http://www.cunofoodservice.com)