



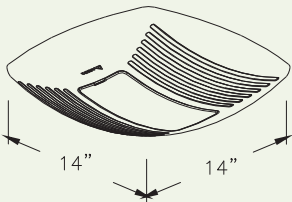


Delta BreezSignature G2 Ventilation Fan/Light Combo Specifications

SIG110L
(110 CFM)

Dimensions

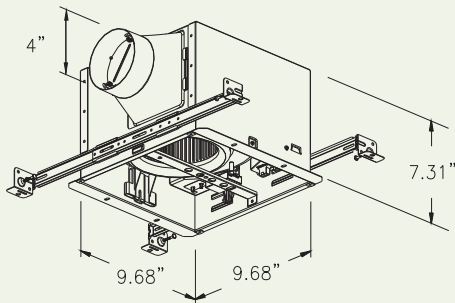

Fan Curve

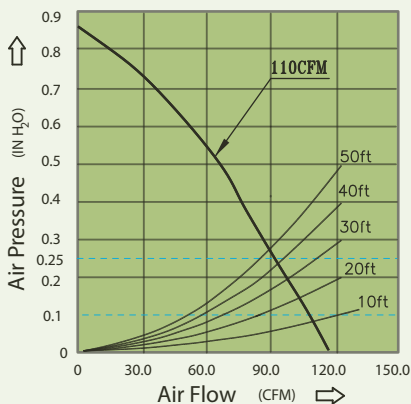

Description

Low noise ceiling mount ventilating fan rated for continuous running. Evaluated by Underwriter Laboratories and conforms to both UL and cUL safety standards. ENERGY STAR® qualified and Home Ventilating Institute (HVI) certified.

Motor/Blower

- Power rating of 120 volts/60Hz.
- DC brushless motor engineered to run continuously.
- Motor equipped with thermal cutoff fuse.
- Removable with permanently lubricated plug-in motor.

Housing

- Galvanized steel body.
- Detachable 4" diameter metal duct adapter.
- Built-in backdraft damper.
- Easy installation with expandable extension bracket.

Grille

- Attractive design using ABS material.

Light

- (1) GU24 26-watt compact fluorescent lamp included.
- (1) E12 4-watt night light included.

Warranty

- 3-year limited warranty.

Features

- Green LED indicator light when fan is running.
- For ceiling mount only, airflow of 110 CFM (±10%), and 0.4 Sones at 0.1" static pressure.
- Power consumption approximately 12.7 Watts with an efficiency rating at approximately 8.8 CFM/Watt at 0.1" static pressure.
- Duct diameter no less than 4".
- UL and cUL listed for tub/shower enclosure when used with GFCI-protected branch circuit wiring.

DC Motor Technology

- Built-in soft start function to increase bearings' life.
- Automatically powers OFF when the impeller is locked abnormally.

Specifications

SIG110L	4" Duct (Standard)	
Static Pressure (Inches w.g.)	0.1	0.25
Air Flow (CFM)	110	92
Sones	0.4	0.8
Power Consumption (Watts)	12.7	15.2
Energy Efficiency (CFM/Watt)	8.8	6.2
Current (Amps)	0.38 Max	
Power Rating (V/Hz)	120/60	
Lamp (Watts)	26	
Night Light (Watts)	4	