



DEV9105-41

# SO-10 Softening Cartridge

## Softening Cartridge



SO-10 Softening Cartridge: DEV9105-41

## BENEFITS

10" softening cartridge for espresso machines reduces scale-forming minerals like calcium and magnesium

Reduces limescale build-up and corrosion in boiler tanks, heating elements, impeller, steam arm, etc.

Reduces downtime and maintenance costs while extending the life of expensive espresso equipment

Drop-in design for use in Costguard filter housings

For dirty (turbid) water a sediment prefilter in addition to a carbon filter is recommended

## INSTALLATION TIPS

Install vertically so bowls hang down.

Allow 2-1/2" clearance below the cartridge for easy cartridge replacement

Make sure O-ring on bowl is sufficiently lubricated

Always screw on bowls by hand; do not use a housing wrench

## OPERATION TIPS

Change cartridges on a regular 6 month preventative maintenance program

Change cartridges when hardness of treated water increases to more than 3 gpg

Service flow rate must not exceed 2.0 gpm

To determine cartridge life, divide total capacity of cartridge by the hardness in grains per gallon (gpg) or milligrams per liter (ppm), respectively

## APPLICATION/SIZING

For commercial espresso, specialty coffee and ice tea machines

750 grains softening

Divide cartridge grain capacity by grains per gallon in influent water to calculate total gallons product water

# S0-10 Softening Cartridge

## SPECIFICATIONS

### Overall Dimensions:

9.75"H x 2.63" Diameter

### Service Flow Rate:


Maximum 2.0 gpm (7.6 Lpm)

### Pressure Requirements:

30 - 125 psi (2.1 - 8.6 bar), non-shock

Temperature: 40 - 100°F (4.4 - 38°C)

No electrical connection required

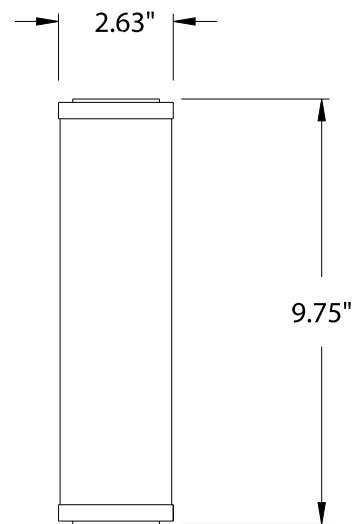

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

## WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.



### Worldwide Headquarters:

EVERPURE, LLC  
1040 Muirfield Drive  
Hanover Park, Illinois 60133  
Toll Free (800) 323-7873  
Tel (630) 307-3000  
Fax (630) 307-3030  
<http://www.everpure.com>

### In Europe:

Pentair Water Belgium B.V./B.A.  
Industriepark Wolfstee  
Toekomstlaan 30  
B- 2200 Herentals  
BELGIUM  
TEL: +32.(0)14.283.500  
FAX: +32.(0)14.283.505

### In Japan:

Hashimoto MN Bldg. 7F  
3-25-1 Hashimoto Sagamihara-Shi  
Kanagawa 229-1103  
JAPAN  
TEL: 81.(0)42.775.3011  
FAX: 81.(0)42.775.3015