

MODEL TR130

(Energy Recovery Ventilators (ERV))



6393 Powers Avenue
 Jacksonville, Florida 32217-2298
 P: 800.961.7370 F: 800.961.7379
 www.solerpalau-usa.com



Specifications


Ventilation Type: Static Plate, Heat and Humidity Transfer				
Typical Airflow Range: 50-140 CFM				
Unit may be mounted in any orientation				
Number Motors: One, 0.1 hp				
V	Hz	Phase	Input Watts	FLA
120	60	Single	121 @ 124 CFM	1.2
Control Voltage: 24 VAC				
Filters: MERV 8, spun polyester media. 10-1/2" x 10-1/2" x 1"				
Weight: 49 lbs (unit), 58 lbs (in carton)				
Shipping Dimensions: 21" W x 32" L x 17-1/2" H				
Options: SPTL - Percentage Timer Control SPBL - Push Button Point-of-Use Control SFM - Percentage Timer Control with Furnace Interlock SHW-20 - Dehumidistat Control				

Core Performance

Airflow CFM	ESP in H ₂ O	Temp EFF%	Total EFF% Winter/Summer*
52	0.70	83	75/60
69	0.60	80	72/57
94	0.50	76	67/52
113	0.40	73	64/48
132	0.30	70	60/44
141	0.20	68	59/43
148	0.10	67	57/41

* Contact Factory for HVI certification report for complete certified rating.

Dimensions

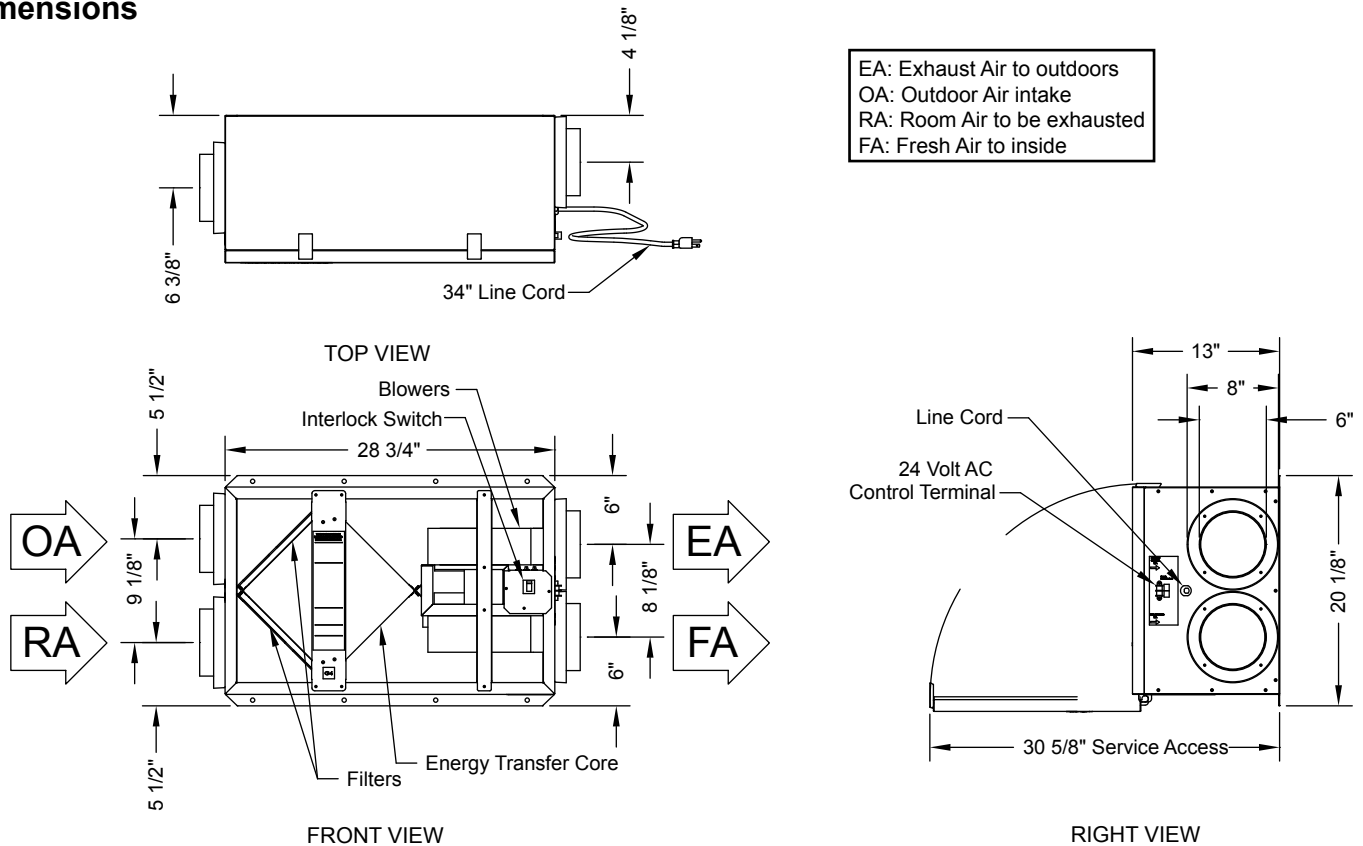

For more information contact us at www.solerpalau-usa.com or 1.800.961.7370 for additional submittal drawings. Soler & Palau will not be responsible for fabrication changes or errors resulting from customer use of a non-current submittal drawing.