

## SPECIFICATIONS

SPECIFICATIONS	TRITON
Model No.	11393GR-US
Height	29" (736mm)
Width	20" (508mm)
Depth	15" (381mm)
Weight	75 lbs (34kg)
Voltage	110 V
Phase	1
Frequency	60 Hz
Current	5 A
Power	470W
Airflow	282cfm (476m3/hr)
Noise Level	57 dba
Refrigerant	R22
Effective Volume	8,369 cu.ft (237m3)
Typical Extraction	52 ppd
Minimum Operating Temperature	33°F (1°C)
Maximum Operating Temperature	95°F (35°C)

FEATURES	TRITON
MODEL NO.	11393GR-US
On / Off Control	✓
Temperature Sensitive Defrost Control	✓
Compressor Type	Rotary
Fitted Mains Plug	✓
Rugged Wheels	✓
Hot Gas Defrost System	✓
25' Length Power Cord	✓
Epoxy Powder Coating	✓
Quiet Operation	✓
Lightweight Compact Portable	✓
Low Amp Draw	✓
Integral Condensate Pump	✓
Pump Purge Switch	✓
Quick Release Hose Coupling	✓
25' Length of PVC Drain Hose	✓
Washable Filter	✓

## APPLICATION

The EIPL Triton Professional Dehumidifier is the ideal unit for commercial and residential work. Its compact size permits one man operation, yet has the capacity to handle several room-size areas at a time. Best of all, it's affordably priced within the budget of most restoration specialists

## KEY DESIGN FEATURES

- Rugged Wheels.
- Collapsible Handle for easy transport.
- High efficiency rotary compressor.
- Extra long power cord (25').
- Temperature Sensitive Defrost. control for optimum performance.
- EIPL's unique "Hot Gas" defrosting feature which automatically melts away frost buildup providing effective operation at low ambient temperatures.
- Rugged, epoxy powder-coated steel chassis and housing.
- Washable Air Filter.
- Simplicity of installation and operation with a standard 115V plug.

Now with  
R407c  
Refrigerant!




# TRITON DEHUMIDIFIER



**A FULL RANGE OF, HIGH CAPACITY, LOW TEMPERATURE DEHUMIDIFIERS FOR WATER DAMAGE RESTORATION**

## HOW A DEHUMIDIFIER WORKS

1. Air is drawn into the unit by a fan
2. Air passes over a cold surface
3. As the air is cooled, it's moisture condenses
4. Water falls into the container
5. Air is re-heated by the heat recovery system
6. Air passes back into room 2°C warmer and considerably dryer
7. Defrost system automatically de-ices unit as necessary
8. Unit switches off automatically when container is full
9. When the unit achieves the selected level of dryness it switches off automatically

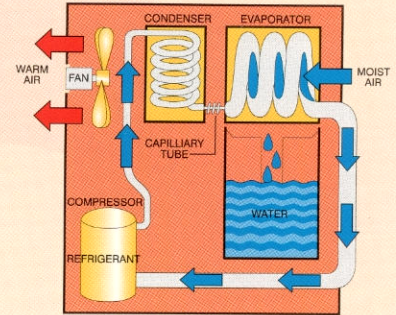

### PROVEN PERFORMANCE

The EIPL Triton Dehumidifier is a rugged yet portable mobile piece of equipment that will operate under extreme conditions and pull large amounts of moisture from the air. Whenever there is a need for fast, dependable, energy-efficient drying, EIPL can provide the answer. The high efficiency Rotary compressor ensures the maximum extraction with the lowest running costs.

### THE PROBLEM

EIPL is a recognized world wide supplier of flood restoration drying equipment. We offer a variety of dehumidifiers and air movers to remove water and assist with drying areas after water damage. Following a flood, whether it is in your basement or office, it's vitally important to restore the damaged area to good order as soon as possible to protect your health from microorganisms, mold and bacteria that may grow and ultimately prevent further damage. Whether it is a flash flood, hurricane, heavy rains or water main break, EIPL has the equipment to handle the harshest environments and assist with proper restoration.

APPLICATIONS	TRITON
MODEL NO.	11393GR-US
Flood & Restoration	✓
Roof Leaks	✓
Basements / Cellars	✓
Rental Yards	✓
Vehicle Storage	✓
Hotels / Guest Houses	✓
Stores	✓
Laboratories	✓
Offices	✓

### THE DEHUMIDIFIER

EIPL dehumidifiers are effective solutions to environmental control problems. The Triton dehumidifier, with its temperature sensitive defrost control ensures optimum performance throughout the units full operating temperature range.

Moisture is removed from the air through an efficient refrigeration process. The fan draws the moist air through the cold evaporator coil, which cools the air below its dew point. Moisture forms on the evaporator coil and is collected in the condensate tray. The cooled air then passes through the hot condenser coil where it is reheated using the same energy removed during the cooling phase, plus the additional heat generated by the compressor. The air is, therefore, discharged from the dehumidifier at a slightly higher temperature with a lower absolute humidity than that which entered. Continuous circulation of air through the dehumidifier gradually reduces the relative humidity within the area.

The small compact / portable size of the Triton allows the unit to be easily moved and transported from job to job.



Ebac Industrial Products Incorporated, 700 Thimble Shoals Blvd.  
Suite 109, Newport News, VA 23606-2575

Tel: (757) 873-6800 Fax: (757) 873-3632 [www.ebacusa.com](http://www.ebacusa.com)

