

VENSTAR®



WIRELESS THERMOSTATS

RESIDENTIAL THERMOSTATS



3.3" w x 4.9" h x 1.4" d



4.9" w x 3.3" h x 1.4" d

STANDARD FEATURES

- Completely wireless - receiver can be mounted at unit or at old thermostat location
- Up to 4 thermostats can be used with one receiver
- Transmits through walls and floors – range up to 500 feet in clear air
- Transmits at 418MHz using pulse code modulation – won't interfere with other wireless systems
- Uses two AA lithium batteries
- 7-day programmable with 4 time periods per day and copy command
- Large, easy to read display with Thermaglow™ backlight
- 64 house codes



MODELS: T110ORF & T110OREC


MODEL T110ORF

- Wireless remote control
- Up to 4 thermostats can be used with each base station
- 7-day programmable with 4 time periods per day
- Copy command
- Energy Star rated
- Optional wall mount power supply available P/N ACC0800



MODEL T110OREC

- Base Station Receiver for wireless thermostat can be mounted at HVAC unit or at old thermostat's location
- One for All™, 2-stage heat, 2-stage cool for use with gas/electric, heat pump, electric & hydronic heat systems

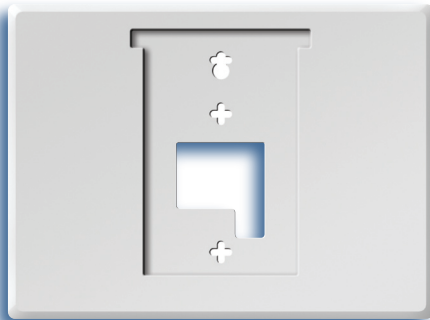

ACC0297
7.3" w x 5.4" h x .2" d