

CABIN AIR FILTER REPLACEMENT

Recommended Replacement Interval: 15,000 miles under normal operating conditions.

GM CENTURY & REGAL '04-'97, IMPALA '09-'00, LUMINA '00-'97, MONTE CARLO '07-'97, INTRIGUE '02-'98, GRAND PRIX '08-'04

Installation Time: 5 min

Tools needed: Yes

Location: Under Hood

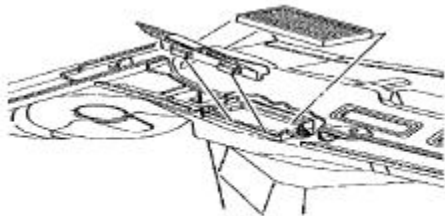


Fig. 1 Cabin air filter replacement

1. Place the windshield wipers in the up position by turning the ignition switch Off when the wipers reach the desired position.
2. Open the hood.
3. Lift the right side of the rear hood seal from the flange in the area of the right air inlet grille.
4. Using a suitable door trim panel pad clip remover, disengage the right air inlet grille retaining clips, then remove the right inlet grille.
5. Remove the cabin air filter element, **Fig. 1**
6. Install the new cabin air filter.
7. Install the right air inlet grille. Ensure the retaining clips are securely engaged.
8. Install the rear hood seal onto the flange.
9. Close the hood and return the windshield wipers to the park position.