

CABIN AIR FILTER REPLACEMENT

Recommended Replacement Interval: 15,000 miles under normal operating conditions.

2006-2002 Toyota Camry & 2005-2001 Toyota Rav 4

Installation Time: 5 min

Tools needed: No

Location: Glove Box


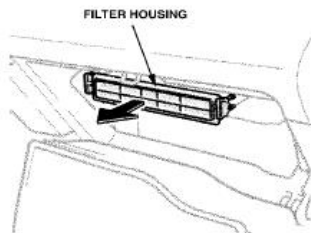


Fig. 1 Cabin air filter housing removal

1. Open the glove compartment door.
2. Remove the screw retaining the damper rod to the right side of the glove compartment door, then detach the damper rod.
3. Push inward at each side of the glove compartment door to disengage the retainers, and then lower the door.
4. Through the glove compartment opening, remove the filter housing from the filter outlet, **Fig. 1**.
5. Remove the cabin air filter element from the filter housing, **Fig. 2**.

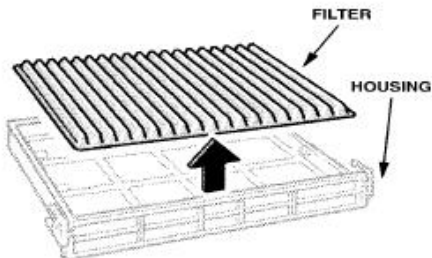

6. Install the new cabin air filter element on to the filter housing. Ensure the filter element is properly positioned on the housing, **Fig. 2**.
7. Install the cabin air filter housing into the filter outlet.
8. Push inward at each side of the glove compartment door, then raise the door into place.
9. Position the damper rod to the right side of the glove compartment door, then install the retaining screw.
10. Close the glove compartment door.

CAFINS162
87139-32010
88568-52010
REV 060107