

# CABIN AIR FILTER REPLACEMENT


Recommended Replacement Interval: 15,000 miles under normal operating conditions.

**2007-03 Pontiac Vibe; 2007-2006 Toyota Tacoma**


Installation Time: 5 min or less

Tools needed: Yes

Location: Glove Box

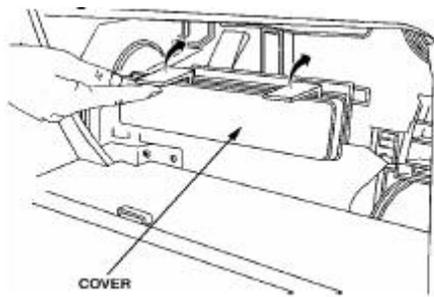

**Fig. 1 Cabin air filter access cover removal**

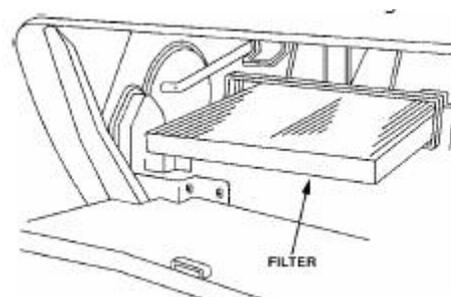

**Fig. 2 Cabin air filter replacement**

1. Open the glove compartment door.
2. Remove the screw retaining the damper rod to the right side of the glove compartment door, and then detach the damper rod.
3. Push inward at each side of the glove compartment door to disengage the retainers, and then lower the door.
4. Through the glove compartment opening, depress the cabin air filter access cover retaining tabs, and then remove the cover, **Fig. 1**.
5. Remove the cabin air filter through the access cover opening, **Fig. 2**.
6. Install the new cabin air filter through the access cover opening. If the filter is equipped with air flow direction markings, ensure the arrow and UP symbols on the filter element are facing upward.
7. Install the cabin air filter access cover. Be sure the access cover retaining tabs are properly engaged.
8. Push inward at each side of the glove compartment door, and then raise the door into place.
9. Position the damper rod to the right side of the glove compartment door, then install the retaining screw.
10. Close the glove compartment door.