

Building Automation Relay

Designed For Use With Unitary Controls


Features

- LED indicates when relay is energized
- Moveable override jumper
- Designed for use with triac output
- Angled terminal strips for easy wiring
- Snap track mounting (track included)
- Multiple relays can be mounted on a section of track
- Double-back tape included for fast, easy mounting

Specifications



- Part Number: RY-1-BA
- Input Voltage: 24 Volt AC / DC
- Contact Rating: 10 Amps @ 120 Volts
6 Amps @ 277 Volts
- 1/8 HP @ 120 / 277 Volts
- Coil draws 14 mA

RY-1-BA
SPDT Relay

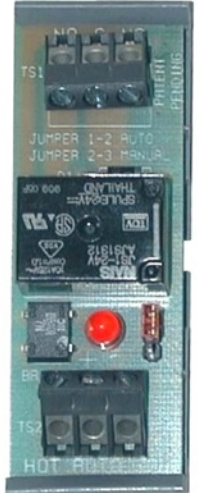

(Actual Size)

Jumper 1 & 2 for automatic control
Jumper 2 & 3 for manual override

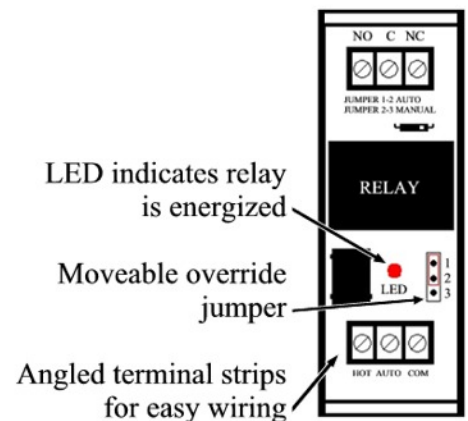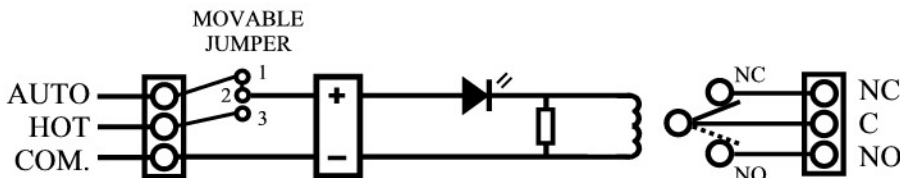

02-09-01

Jackson
SYSTEMS

5418 Elmwood Avenue Indianapolis, IN 46203

317.788.6800 Fax: 317.227.1034

www.jacksonsystems.com

info@jacksonsystems.com