

WATER FILTER CARTRIDGE REPLACEMENT


- 1) Lift the grille assembly to access the water filter. To lift the grille, pull out on the bottom edge of the grille and tilt the grille frame forward. Refer to the grille access illustration below.
- 2) Slowly rotate the old filter cartridge 1/4 turn counterclockwise to disengage. Gently twist until the cartridge is free from the base. **DO NOT** pull. There will be water in the filter cartridge, so it is normal for a small amount of water to spill out. Refer to the water filter illustration below.
- 3) Remove the new filter cartridge from its packaging and carefully remove the cap.
- 4) Line up the cartridge so that the locking tabs can be inserted into the filter head.
- 5) Rotate the filter cartridge into the base about 1/4 turn clockwise until it stops. **DO NOT** overtighten.
- 6) After the new filter cartridge is installed, the first full bucket of ice produced should be discarded. This will help clean the water system and clear air from the line. Allow 24 hours before discarding the first bucket of ice.

WATER FILTER BYPASS MODE


If you choose not to use the water filtration system, the system can be placed in water filter bypass mode. In this mode, the water supplied to the ice maker will not be filtered and the electronically controlled water filter monitor will be deactivated.

The water filtration system automatically goes into bypass mode when the filter cartridge is removed. Once a filter cartridge is reinstalled, the water filtration system will be activated and the water filter monitor function will resume.

IMPORTANT NOTE: If you are using a reverse osmosis system, the water filter cartridge must be removed to put the water filtration system into bypass mode.

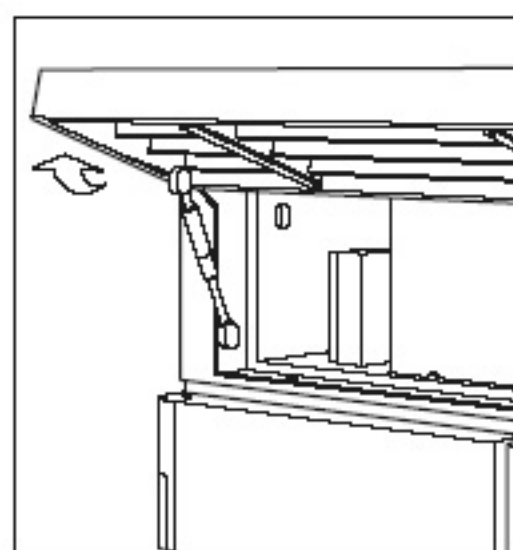

Grille access

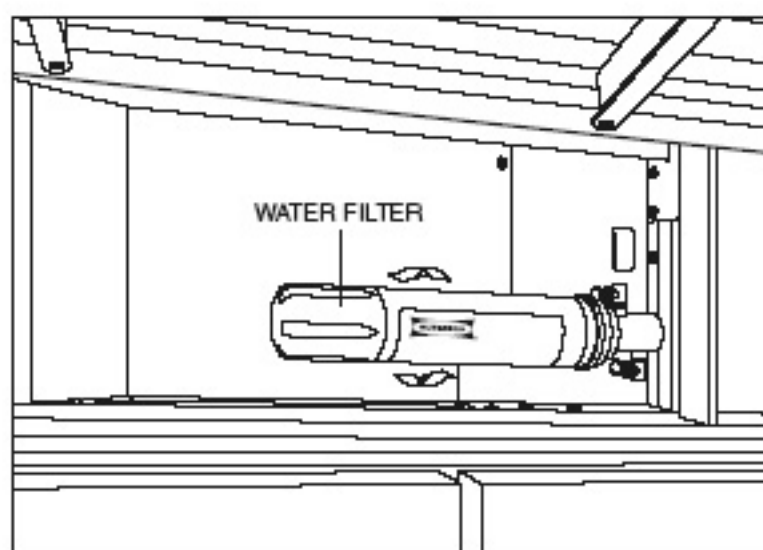

Water filter