




# Fantech

## SHL Series Range Hood Liner

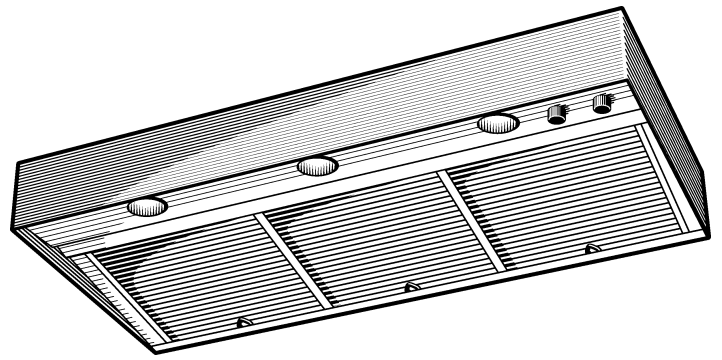

### READ AND SAVE THESE INSTRUCTIONS

- Before beginning installation, please thoroughly read and become familiar with these instructions.
- Installation and service must be completed by a qualified installer.
- Failure to properly install this product may void the warranty.

**Installer:** Please leave these installation instructions with the homeowner.

**Owner:** Please keep these installation instructions for local electrical inspector's use and for future reference.

### WARNINGS: TO REDUCE THE RISK OF FIRE, ELECTRIC SHOCK, OR INJURY TO PERSONS OBSERVE THE FOLLOWING:

- Use this unit only in the manner intended by the manufacturer. If you have any questions, contact the manufacturer.
- Before servicing or cleaning unit, switch power off at service panel and lock the service disconnecting means to prevent power from being switched on accidentally. When the service disconnecting means cannot be locked, securely fasten a prominent warning device, such as a tag to the service panel.
- Installation work and electrical wiring must be done by qualified person(s) in accordance with all applicable codes and standards, including fire-rated construction.
- Sufficient air is needed for proper combustion and exhausting of gasses through the flue (chimney) or fuel burning equipment to prevent back drafting. Follow the heating equipment manufacturer's guideline and safety standards such as those published by the National Fire Protection Association (NFPA) and the American Society for Heating, Refrigeration and Air Conditioning Engineers (ASHRAE) and the local code authorities.
- When cutting or drilling into wall or ceiling, do not damage electrical wiring and other hidden utilities.
- Duct fans must always be vented to the outdoors.

**CAUTION:** For general ventilating use only. Do not use to exhaust hazardous or explosive materials and vapors.

### WARNINGS: TO REDUCE THE RISK OF A RANGE TOP GREASE FIRE:

- Never leave surface units unattended at high settings. Boil-overs may cause smoking and greasy spillovers that may ignite. Heat oils slowly on low or medium settings.
- Always turn hood ON when cooking at high heat or when cooking flaming foods.
- Clean ventilating fans frequently. Grease should not be allowed to accumulate on fan or filter.
- Use proper pan size. Always use cookware appropriate for the size of the surface element.

### WARNING: TO REDUCE THE RISK OF INJURY TO PERSONS IN THE EVENT OF A RANGE TOP GREASE FIRE, OBSERVE THE FOLLOWING:

- SMOTHER FLAMES with a close-fitting lid, cookie sheet or metal tray, then turn off the burner. BE CAREFUL TO PREVENT BURNS. If the flames do not go immediately, EVACUATE AND CALL THE FIRE DEPARTMENT.
- NEVER PICK UP A FLAMING PAN You may be burned.
- DO NOT USE WATER, including wet dishcloths or towels – a violent steam explosion will result.
- Use an extinguisher ONLY if:
  - You know you have a Class ABC extinguisher, and you already know how to operate it.
  - The fire is small and contained in the area where it started.
  - The fire department is being called.
  - You can fight the fire with your back to an exit.

## PART 1 Planning the Installation

### CAUTION:


- To reduce the risk of fire and to properly exhaust air, the liner must be exhausted to the outside. Never exhaust into a wall, an attic or a concealed area in the building. This can create a potential hazard.
- Consult a licensed ventilation contractor or qualified technician for proper installation of exhaust ducting.
- Locate the cooking area for minimum cross drafts – away from doors and windows, when possible.
- Ducts must be of adequate size and duct runs should be as short as possible. Where turns are necessary, keep turning radius as large and as smooth as possible.
- The ducting must be air tight. Use a minimum of 2 sheet metal screws at every duct joint. Then, seal the duct joints with high quality duct tape.
- Only use ductwork constructed of materials deemed acceptable by state, municipal and local codes.

### NOTES:

- The hood liner is designed to install inside a custom hood enclosure and operates with a remotely mounted blower (purchased separately). See Fig. 1 for hood dimensions. See chart at right for Fantech exhaust fans recommended for use with this unit.
- A qualified person must complete the installation of this appliance.
- Plan the installation so that all minimum clearance are met or exceeded.
- **IMPORTANT:** You must provide support framing and backing in the areas in which you are securing the liner to in your custom canopy. Failure to do so could damage the liner and void the warranty.

All dimensional tolerances are 0" to 1/16 unless otherwise stated

Figure 1

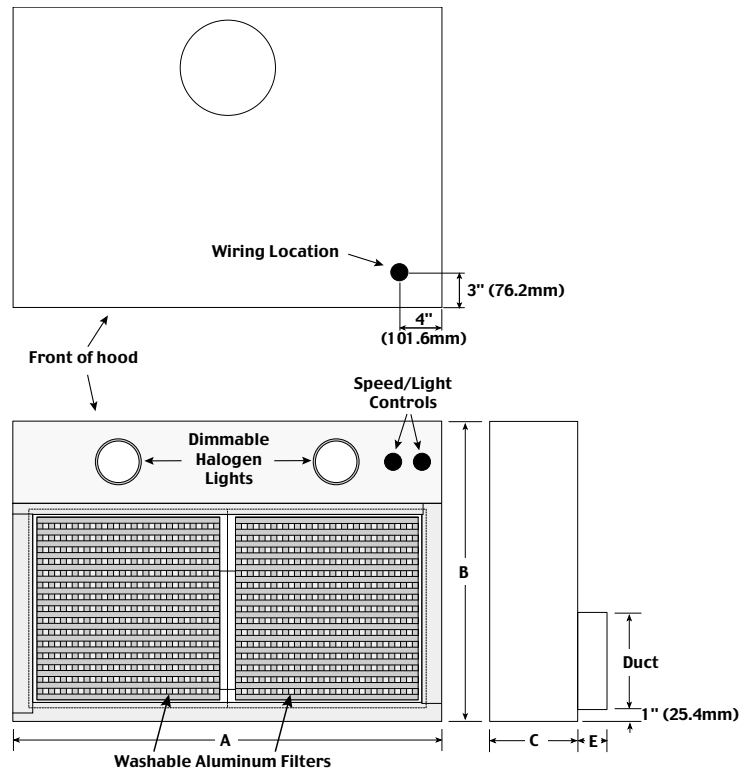

Model	UPC#	Duct †	A	B	C	E
SHL36	47036	8	34 1/2	22	6	3
SHL48	47048	10	46 1/2	22	6	3

Dimensional information shown in inches.

†Duct connections are 1/8" smaller than duct size.

### NOTES:

- The hood liner uses 120VAC, 60 Hz power. supply wires should be installed by a qualified person(s) and must meet all electrical codes. The SHL36 Hood Liner is designed for use with 8" diameter round duct and the SHL48 is designed for use with 10" diameter duct. Use only rigid metal duct.
- Fantech "Duct Silencers" are available from your local Fantech dealer. When planning for installation using a Duct Silencer, please refer to the installation instructions provided with the unit.
- A quality cap with built in backdraft damper or an inline damper is recommended to minimize cold air return through the duct when the product is not in use.
- Always install ventilation products with an approved wall or roof cap.
- Duct performance is improved by using round, smooth metal duct work instead of rectangular.
- If multiple elbows must be used, ensure that there is a minimum of 24" of straight duct between any two elbows.
- Avoid "S:" or back to back configurations caused by adjacent elbows.
- Route ducting to terminate at the hood liner.

**WARNINGS:** Following Are Manufacturer's Suggestions. Always Observe Local Building Codes.

- Liners installed in custom canopies constructed of combustible materials, should be installed with the combustible material structure a minimum of 36" above the surface of the heating element.
- Liners installed in custom canopies constructed of non-combustible materials, should be installed with the non-combustible material structure a minimum of 30" above the surface of the heating element.
- Follow all instructions regarding minimum safe clearances and installation location. Failure to do so may result in a safety hazard or fire.
- To reduce the risk of fire use only metal ductwork.

## CHOOSING THE RIGHT REMOTE MOUNT BLOWER

Below is a chart of the recommended Fantech fans that can be used with the SHL Series Range Hood Liner. Some models remotely mount in the attic. Other models are used when installation requires a roof mount or wall mount fan.

### SHL36

Model	Location	Mounting	Airflow at 0"	Typical Airflow†	Sones	Sones with Silencer
FX 8	interior	inline	481	370	7.3	2.6
FX 8XL	interior	inline	521	450	10.0	3.3
FKD 8XL	interior	inline	836	650	14.1	6.3
FKD 10XL	interior	inline	1266	1020	20.2	8.0
RVF 8XL	exterior	wall	435	370	9.8	3.7
RE 8XL	exterior	roof/wall	401	350	9.7	3.6
RE 10XL	exterior	roof/wall	753	700	16.4	5.2

### SHL48

Model	Location	Mounting	Airflow at 0"	Typical Airflow†	Sones	Sones with Silencer
FX 10	interior	inline	481	370	7.3	2.6
FX 10XL	interior	inline	521	450	10.0	3.3
FKD 10	interior	inline	836	650	14.1	6.3
FKD 10XL	interior	inline	1266	1020	20.2	8.0
FKD 12XL	interior	inline	2016	1460	18.9	8.4
RE 10XL	exterior	roof/wall	753	720	16.4	5.2

†Typical airflow is an estimate based on a system with 20-feet of duct, two 90 degree elbows, backdraft damper, roof cap and filter.

Note: Due to the large volume of air that these remote blowers move, it is important that a source of sufficient make up air is available to avoid backdrafting in the house.

## PART 2 Electrical Connection

### WARNINGS:

1. Ensure that the power supply is disconnected before proceeding.
2. Verify that the power supply matches the ratings found on the appliance data label before proceeding.
3. The complete appliance must be properly grounded at all times when electrical power is applied.
4. Do not ground the appliance with the neutral (white) house supply wire. A separate ground wire must be utilized.
5. Failure to complete electrical connections properly may result in damaged or non-functional systems. Follow instructions carefully to ensure proper installation.


- It is the owner's responsibility to ensure that a qualified electrician performs the electrical connection of this appliance. The electrical installation, including minimum supply wire size, must comply with the National Electric Code ANSI/NFPA 70-1990 (or latest revision) and local codes and ordinances.

- A copy of this standard may be obtained from: National Fire Protection Association, 1 Batterymarch Park Quincy, Massachusetts 02269-9101

### INSTRUCTIONS:

1. A 15 to 20 amp electrical service is recommended for proper electrical supply. Before determining, calculate amp ratings based on the product label found on the liner and the ventilator. (Always observe local building codes).
2. Always use a dedicated circuit.
3. Line load is calculated by adding the amperage of the halogen lights to the rated amperage of the ventilator (either in-line or roof top). If the ventilator is rated in watts rather than amps, divide the watts by 120 and this will give you the amperage rating.
4. The Fantech liner is supplied with a 5.0 amp variable speed fan control. Make sure the rated amperage on the ventilator does not exceed 5.0 amps.
5. The Fantech liner has been designed to accommodate several different motor speed controls, (for example Thermador™ model CTR3-Q) Always consult the manufacturer's installation instructions when substituting control switches.
6. Wire connections: (Figure 2)
  - Black – 120 VAC from electrical panel (black)
  - White- Neutral from electrical panel (white)
  - Green – Ground from electrical panel (green)
  - Red- 120 VAC variable control to 120 VAC of ventilator

Figure 2

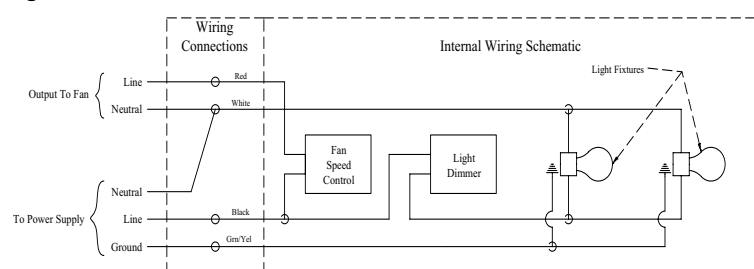

### CAUTION:

The neutral wire (usually white) for the ventilator must connect to the same neutral wire that comes from the electrical panel to the liner. It is recommended to run a white neutral wire from the liner's white neutral wire along the same path as the red wire from the liner's variable speed control to the ventilator.

## PART 3 Securing the Liner

### SECURING INSTRUCTIONS:

1. Because the professional series liner was designed for custom applications, no mounting holes have been pre-drilled. This allows you to attach the liner in the areas of the canopy which have ample support and backing.
2. You must secure the liner through both right and left sides, through the back and through the top.
3. Remove the filters. Mark and drill screw holes through the liner as required for custom canopy. Secure the liner by driving screws (provided by others) through the stainless steel into the framing and backing.

### CONNECTING TO THE VENT PIPE:

1. Insert the tabbed end of the galvanized Start Collar into the round hole in the outside top of the liner.
2. Bend all of the tabs firmly in places against the inside top of the liner. Sheet metal screws should be placed equidistant through 3 or more tabs. CAUTION: for safety of the person cleaning this liner, neatly cover the well-flattened tabs with 2 or more layers of metal tape.
3. Attach the other end of the Start Collar to the range hood vent with a minimum of 3 equidistant screws and metal tape.

## PART 4 Use & Care

### OPERATING CONTROLS:

1. Always activate the ventilator whenever using cooking appliances.
2. Activate the ventilator a few minutes before starting to cook to establish an airflow pattern within the room.
3. Adjust the fan speed according to the amount of cooking exhaust.
4. Adjust the dimmable halogen lights as desired.
5. Eliminate air currents in the hood vicinity by shutting nearby windows and doors, turning off ceiling fans and closing the adjacent heating and air conditioning outlets.
6. Place your largest pans, skillets and stock pots on the rear burners whenever possible.

**WARNING:** DO NOT operate the vent system without the filters in place, or with dirty, grease laden filters.

### ENERGY SAVING TIPS:

1. Do not operate the blower at a speed that is higher than necessary to remove the cooking exhaust. Running at excessive speeds removes more air from the inside of the house that must be replaced by outside air. This may be especially costly when your home's heating or air conditioning system is in operation. Turn off the unit once the smoke and cooking odors have been eliminated.
2. Clean filters and grease laden surfaces often to improve efficiency.
3. Always use lids on cookware to retain heat and moisture.
4. Minimize the amount of liquid used to cook food.
5. Select cookware of proper size, material and construction for the cooking task being performed.

### CARE & CLEANING:

1. Proper cleaning is necessary to maintain performance and appearance, while also ensuring safe operation. The frequency of cleaning should be adjusted according to the type and amount of cooking. Best results will be achieved by cleaning soiled components as soon as possible.
2. Filters must be cleaned regularly. Remove one filter at a time, grasp the filter handle and gently pull toward you, then down and back. Filter should be installed with the handle in the rear filter slot.
3. The filters may be cleaned by hand washing in hot water using a mild detergent solution, or by placing them in the top rack of an automatic dishwasher. Dry the filters completely before using again.
4. Stainless steel surfaces should be cleaned with a solution of mild detergent and warm water. Rinse and dry with a soft lint-free cloth. **CAUTION:** Do not use any type of pad that will scratch the liner
5. **CAUTION:** If a commercially available stainless steel cleaner is used. It is important to read the labels for chlorine compounds. Chlorine is a corrosive substance. If these compounds are present, rinse thoroughly and dry with a soft lint-free cloth. Follow polish manufacturer's instructions.
6. Always wipe stainless steel surfaces with the grain. Never wipe across the grain.
7. After cleaning, reinstall the filters carefully.

### REPLACING LIGHT BULBS:

Par 20 halogen lamps are available in many different styles and sizes.

Following is a list recommended by the manufacturer:

- Philips MASTER Line 50 watts 120V
- Felt Electric 50 watt 130V
- Industrial Grade Premium Quality™ P.Q.L. Incorporated Code 83009



**Fantech**  
www.fantech.net  
info@fantech.net

#### United States

1712 Northgate Blvd. • Sarasota, FL. 34234  
(T) 1.800.747.1762 • (F) 1.800.487.9915  
(T) 1.941.309.6000 • (F) 1.941.309.6099

#### Ontario & Western Canada

10-6665 Tomken Rd., Mississauga, ON L5T 2C4  
(T) 1.800.407.6195 • (F) 1.800.407.8965  
(T) 1.905.696.9241 • (F) 1.905.696.9236

#### Québec & Atlantic Provinces

50 Kanalfakt Way, Bouctouche, NB E4S 3M5  
(T) 1.800.565.3548 • (F) 1.800.747.8116  
(T) 1.506.743.9500 • (F) 1.506.743.9600

Article #: 301032  
Revision Date: 030503