



Santa Fe HC Performance and Technical Specifications

Part Number:	4025081
Blower:	323 CFM @ 0 IWG 307 CFM @ .20 IWG 285 CFM @ .40 IWG
Kilowatts:	1.13 (80°F, 60% RH)
Supply Voltage:	115 volt – 1phase – 60 Hz
Amps:	11.4
Energy Factor:	2.03 (80°F, 60% RH)
Operating Temp:	56°F Min., 100°F Max.
Capacity:	135 Pints/Day (80°F, 60% RH)
Sized for:	3200 Sq. Ft. - Typical

Performance at Set Conditions

Intake Air:	80°F, 60%RH
Water Removal:	135 Pints/Day
Pints/KWH:	4.3


Filter Efficiency:	MERV-11 (16" x 20" x 2") Standard 65% Efficient ASHRAE Dust Spot Test
--------------------	---

Power Cord:	6' – 115 volt grounded plug
Drain Hose:	.56" ID x 8'





HC Dimensions:	Shipping Dimensions:	
Width:	33"	39"
Height:	18-3/4"	28-1/2"
Depth:	20-3/4"	25"
Weight:	100 lbs	138 lbs

Optional Accessories for the Santa Fe HC

Part No.	Description
4024368	10" Return Collar
4022220	Condensate Pump Kit: 3/8" ID x 20' long hose with 15' lift, Pump
4020175	Honeywell Dehumidistat (Professional Installation Required)
4021475	Standard Filter (16 x 20 x 2") MERV-11
4025463	Santa Fe HC Cart

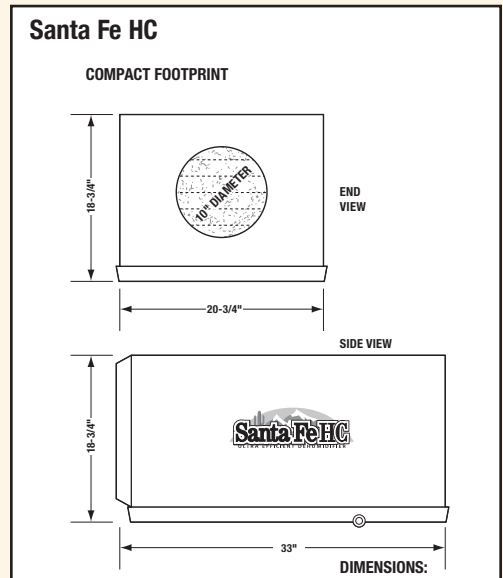

Santa Fe HC Ultra Efficient Dehumidifier

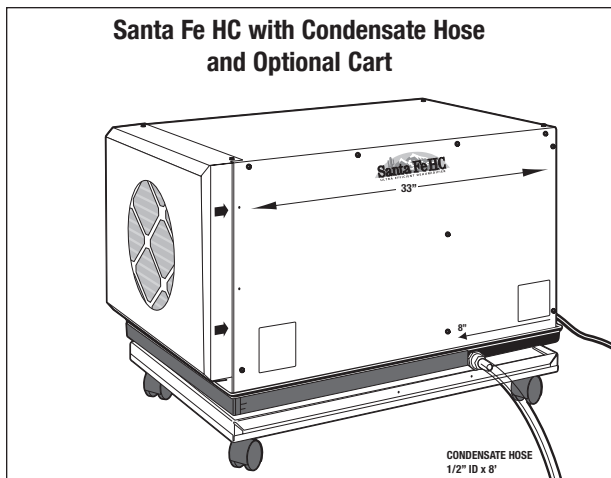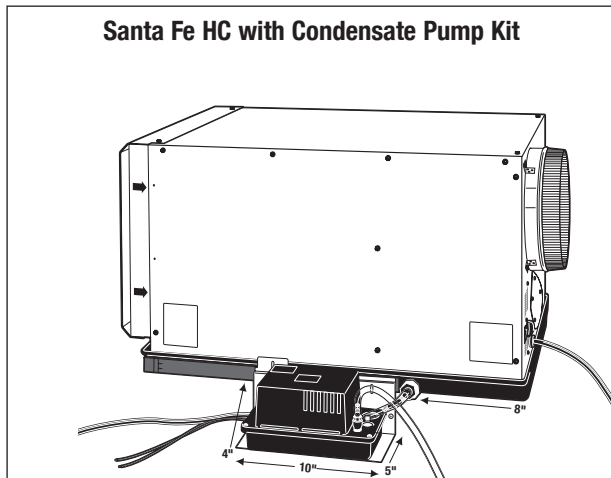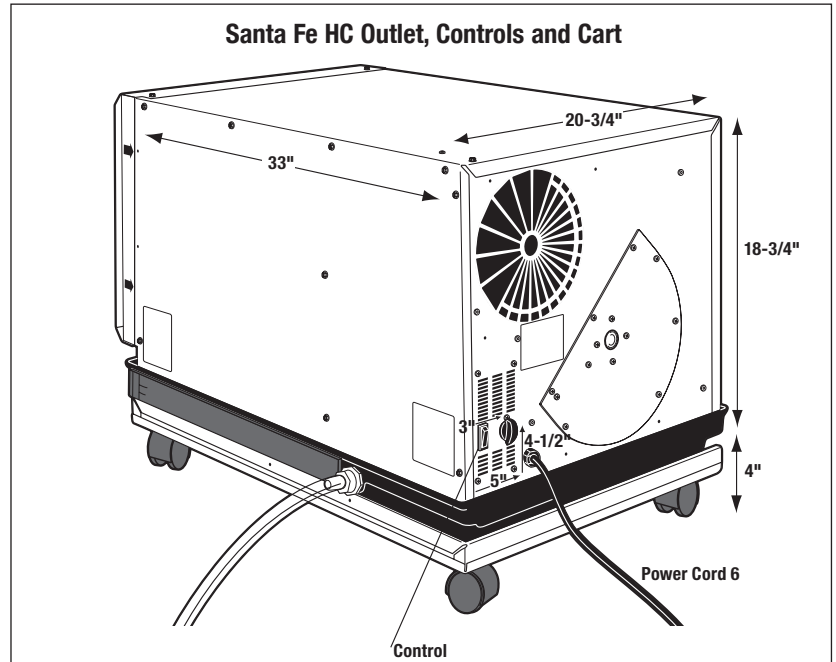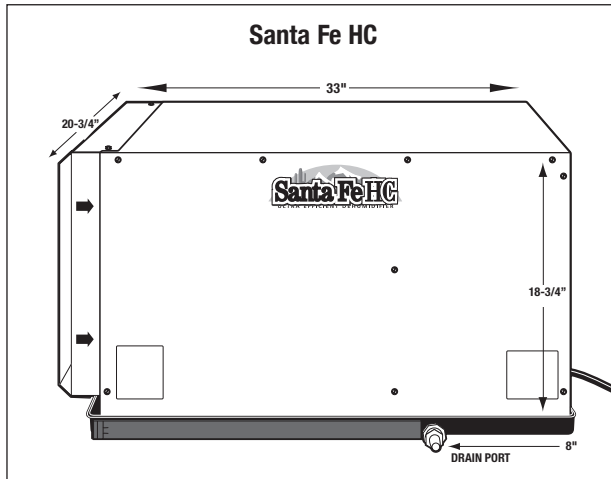

Benefits of Owning a Santa Fe HC

Relative humidity levels rising above 60% stimulate the growth of mold, mildew, bacteria and other biological allergens, which generates those “musty” odors. The lower relative humidity eliminates the growth of mold and those musty odors.

The Santa Fe HC will control the basement or crawlspace relative humidity. The Santa Fe HC is designed to operate down to 56°F and will continue to effectively remove humidity at that temperature.

The Santa Fe HC also adds a little heat to the area, so a cold, damp basement or crawlspace becomes a little warmer and a lot drier.

The reduced relative humidity also creates a less hospitable climate for mold and many “bugs,” including dust mites, centipedes, silver-fish, and spiders.

Using a dehumidifier to control humidity in your basement or crawlspace is the most cost-effective way to get usable space and eliminate humidity related problems.

Call for More Information
1-800-533-7533

phone 608-222-5301 fax 608-222-1447



P. O. Box 8680
Madison, WI 53708
www.thermastor.com

Phone 608-222-5301
Toll-Free 1-800-533-7533
sales@thermastor.com