

**A FULL RANGE OF  
HIGH CAPACITY,  
LOW TEMPERATURE  
DEHUMIDIFIERS FOR  
RENTAL YARDS,  
STORES, INDUSTRY,  
INSTITUTIONS, AND  
HOMES**



## **WM150** *Wall Mounted Dehumidifier*

### **Features:**

- 1) High capacity
- 2) High efficiency=low amp draw
- 3) Inlet Air Filter
- 4) High Performance Cross-flow Fan
- 5) Internal Humidistat
- 6) Wall Mounting Option
- 7) Reverse Cycle Defrost
- 8) Rubber Feet For Free Standing Application
- 9) On/Off Switch
- 10) Drying and Defrost Indicator Lamps
- 11) Optional Internal Condensate Pump
- 12) Extra Long Power Cord
- 13) Powder Coat finish for long term protection

### **Specifications:**

Model: WM150	Volts: 115
Compressor: Reciprocating	Amps: 8.5
12,000 BTU/hr	Capacity: 27 Gallons per day
R-22 Refrigerant	Cfm: 650
Operating Range: 33°F – 105°F	Dimensions: 31.7" x 11.6" x 26.8"
	Weight: 124.6lbs


### **Benefits:**

High performance cross-flow fan motor

Optional Internal condensate pump.



Ebac's outstanding customer service and over 20 years expertise.

Ebac's 1-year limited warranty.

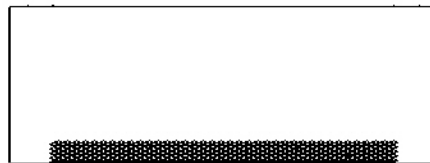

### **Operation:**

The effective answer to excessive humidity is a refrigerant type dehumidifier. Warm, moist air is drawn by a fan. The air is then drawn through the evaporator coil which further cools the air below its dew point and water is condensed and collected into the drain tray. The air is then reheated by the condenser coil and discharged from the dehumidifier at a slightly higher temperature with a lower absolute humidity. Continuous circulation of air through the dehumidifier gradually reduces the relative humidity within the area.

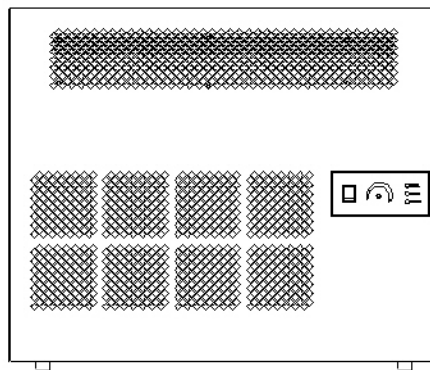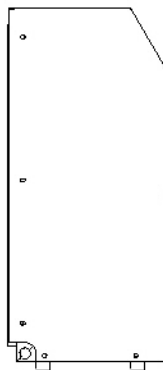

**700 Thimble Shoals Blvd, Suite 109  
Newport News, VA. 23606-2575  
info@ebacUSA.com**

**Telephone (757) 873-6800  
Fax: (757) 873-3632  
Toll Free: 1-800-433-9011**