

**A FULL RANGE OF
HIGH CAPACITY,
LOW TEMPERATURE
DEHUMIDIFIERS FOR
RENTAL YARDS,
STORES, INDUSTRY,
INSTITUTIONS, AND
HOMES**



WM80 *Wall Mounted Dehumidifier*

Features:

- 1) High capacity
- 2) High efficiency=low amp draw
- 3) Inlet Air Filter
- 4) High Performance Cross-flow Fan
- 5) Internal Humidistat
- 6) Wall Mounting Option
- 7) Hot Gas Defrost
- 8) Rubber Feet For Free Standing Application
- 9) On/Off Switch
- 10) Drying and Defrost Indicator Lamps
- 11) Optional Internal Condensate Pump
- 12) Extra Long Power Cord
- 13) Powder Coat finish for long term protection

Specifications:

Model: WM80	Volts: 115
Compressor: High Efficiency Rotary	Amps: 2.5
6,625 BTU/hr	Capacity: 15 Gallons per day
R-22 Refrigerant	Cfm: 360
Operating Range: 33°F – 105°F	Dimensions: 21.8" x 11.3" x 19.3"
	Weight: 82.7lbs


Benefits:

High performance cross-flow fan motor

Optional Internal condensate pump.



Ebac's outstanding customer service and over 20 years expertise.

Ebac's 1-year limited warranty.

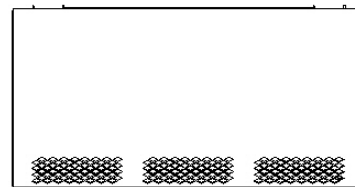

Operation:

The effective answer to excessive humidity is a refrigerant type dehumidifier. Warm, moist air is drawn by a fan. The air is then drawn through the evaporator coil which further cools the air below its dew point and water is condensed and collected into the drain tray. The air is then reheated by the condenser coil and discharged from the dehumidifier at a slightly higher temperature with a lower absolute humidity. Continuous circulation of air through the dehumidifier gradually reduces the relative humidity within the area.

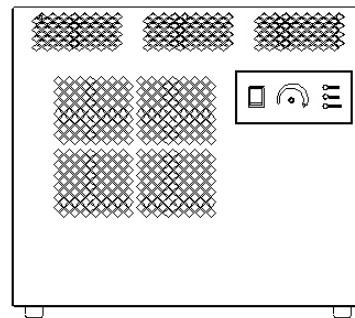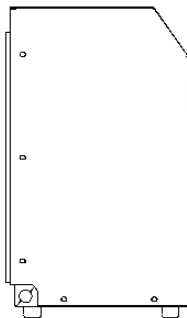

**700 Thimble Shoals Blvd, Suite 109
Newport News, VA. 23606-2575
info@ebacUSA.com**

**Telephone (757) 873-6800
Fax: (757) 873-3632
Toll Free: 1-800-433-9011**